




RUBBER TENSION SCREENS

Selection of suitable rubber thickness and aperture size is dependant on many factors:

1. Screen Angle
2. Feed material size and shape
3. Tonnage over the screen
4. Rotation of the screen
5. Required product sizing

Our technical staff can recommend the most suitable aperture and thickness for a given application.

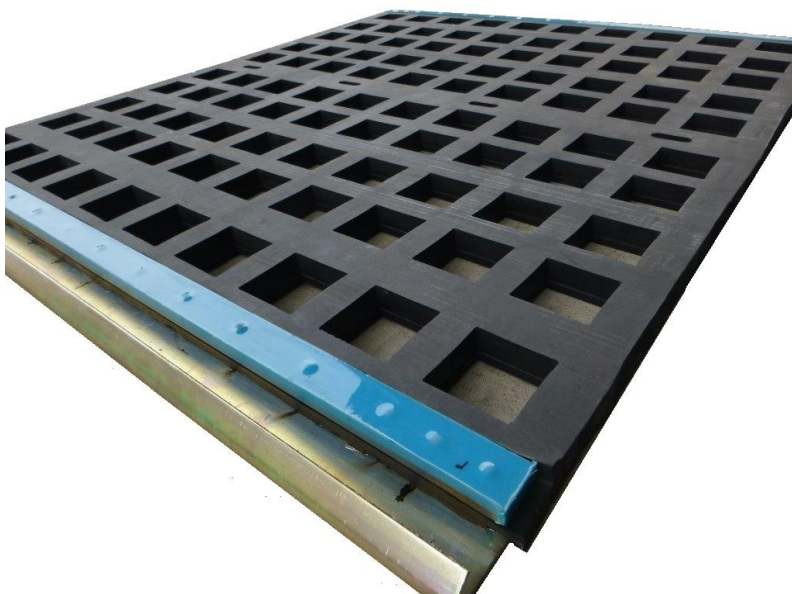

Aperture Types

A full compliment of aperture types available in round, square or slotted configurations. The slotted apertures are available in cross flow, with flow, in line or staggered patterns. The square and round apertures are available in staggered or in line patterns. Aperture sizes range from 2.5mm to 250mm.

Christchurch

P 0800 880 233

F 0800 880 234

sales@advanced.eng.co.nz

Brisbane

P 61 7 3713 7744

F 61 7 3713 7788

sales@advanced-eng.com.au

Melbourne

P 61 3 9363 1577

F 61 3 9363 6099

sales@advanced-eng.com.au

For more information on our products and services visit our website at www.advanced-engineering-group.com