

T-BOLT TRACKED RUBBER WEAR LINERS

(60 Duro rubber liner/ aluminium T-Bolt track)

Polymer	NR/BR	
Colour	Black/ Aluminium Tracks	
Specific Gravity	1.10	ASTM D297
Hardness	60° ± 5° Shore A	ASTM D2240
Abrasion	90mm ³ (max) @ 10N	ASTM D5963
Tensile Strength	20 MPa (min)	ASTM D412
Elongation @ Break	450% (min)	ASTM D412
Tear Strength	80 N/mm (min)	ASTM D624
Temperature Range	-20°C to +70°C	

AVAILABLE SIZES

- 55mm, 80mm (Standard thickness)
- 600mm x 1000mm
- 600mm x 1500mm
- 750mm x 1000mm
- 750mm x 1500mm

Install Advanced Engineering Groups T-BOLT TRACKED RUBBER WEAR LINERS to protect steel surfaces, absorb energy from impact, reduce abrasion and vibration, lower noise and dust emissions.


Strong, Lightweight, Easy/Fast Install with T-BOLT assemblies

INDUSTRIES

- CONSTRUCTION
- QUARRIES
- MINING
- MINERAL PROCESSING

Ideal for the following applications

- CHUTES AND FEED SPOUT
- CONVEYOR TRANSFER CHUTES AND DEFLECTOR PLATES
- DUMP TRUCK BODIES
- FEEDERS
- HOPPERS AND SURGE BINS
- SCREENS
- And more...

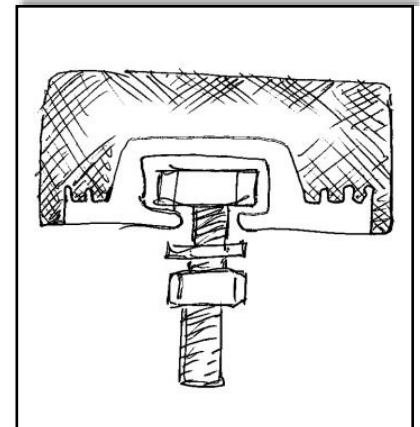

Christchurch
0800 880 233
sales@advanced-eng.co.nz

Brisbane
07 3713 7744
sales@advanced-eng.com.au

Melbourne
03 9363 1577
sales@advanced-eng.com.au